




For help visit incyt by LX
incyt.io/support

Copyright 2021 LX Corporation Pty Ltd. All rights reserved.

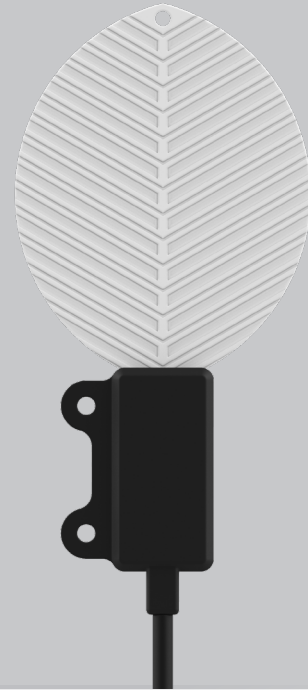


Leaf Wetness Sensor

Quick Start Guide



Product Overview

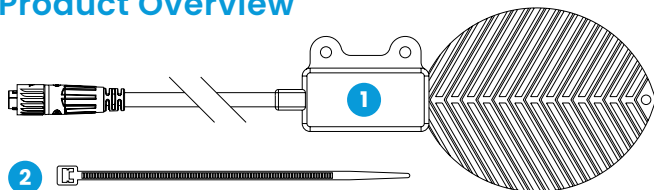

- 1 Leaf wetness sensor
- 2 Mounting cable ties X 6

Preparation

- 1 Unpack the contents of the box.
- 2 This leaf wetness sensor requires a LX Blue Node to function, available for purchase from [Incyt.io](https://www.incyt.io). Follow the instructions provided with the Blue Node to complete setup and activation.
- 3 Ensure all components are functioning correctly before proceeding to field installation.

Installation and Mounting


- 4 Choose an install location that is a similar height to the canopy the sensor is emulating.
- 5 Attach the sensor to a branch or post at a similar angle to the surrounding leaves it is emulating using the supplied cable ties.

- 6 Ensure the sensor is free from dirt and obstructions, and is protected from animals.
- 7 Install the Blue Node on a nearby post according to its Quick Start Guide, and follow the instructions to plug the connector on the leaf wetness sensor into the Blue Node.

The distance from the sensor to the Blue Node should not exceed the length of the leaf wetness sensor cable.

- 6 If possible, ensure that data is correctly reporting before leaving the site.

 Clean the sensor occasionally to maintain accurate readings

 Protect cables from animals by purchasing sheathing from your local hardware store

